



Commercial & Industrial Series LED Lamps - Standard Lengths

DESCRIPTION

The Gold series TLED Lamp inherits Starco's traditional shatterproof gene. The lamp is made with UV-resistant extruded polycarbonate and enables Starco's TLED lamp to be reliable and durable. Equipped with high efficient LEDs, the Gold series TLED lamp can achieve up to 175 lumens per watt and provide an unparalleled quality of light. Our robust electronics withstand extensive voltage surges and perform under heavy duress and high ambient temperatures.

This product works with Starco's innovative Fast-Fuse socket kits, which delivers a quick and easy installation while protecting your infra-structure and workers.



Project:	
Type:	
Note:	

SPECIFICATION FEATURES

Construction & Materials

- Extruded aluminum heatsink maximizes LED lifetime and provides optimal performance
- Durable frosted or clear UV-resistant polycarbonate tube
- Heavy gauge V-0 flammability class polycarbonate end-caps
- Aluminum LED board maximizes heat dissipation
- No glass or mercury is used. Lamp is fully recyclable.

Electrical System

- High efficiency single end powered driver
- Input Voltage: 110-277V, 50/60Hz
- Operating Temperature: -20°C (-4°F) to 45°C (113°F)
- UL Type B direct voltage
- Efficacy up to 175 lm/w
- Wattage: 9W to 22W
- Power Factor: >0.90
- Total Harmonic Distortion: <15%
- Surge Protection: 1.5kV
- FCC Compliant
- Fast-Fuse Technology
- Beam Angle: 240°

Optical System

- High impact polycarbonate optics provides even distribution
- Frosted lens maximize glare reduction. Beam angle is 240°.

Controls

- On/Off with occupancy sensor
- Support multi level on/off control
- Limited Dimmable Functionality


LED

- CRI: 70+, 80+, 90+
- CCT: 3000K, 3500K, 4000K, 5000K
- Calculated L₇₀: 189,900 hours @ 25°C
- Reported L₃₀: 58,000 hours @ 25°C

Warranty

- 8 Years, 24/7, No Caveats!

DIMENSION

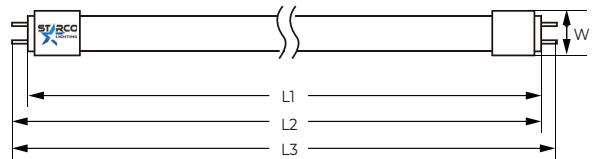

Model	L1		L2		L3	W	Unit
	MAX	MIN	MAX	MAX	MAX		
2 ft	23.61	23.71	23.75	23.89	1.14	inch	
600mm	599.5	602.1	606.3	606.8	29.0	mm	

Model	L1		L2		L3	W	Unit
	MAX	MIN	MAX	MAX	MAX		
3 ft	35.22	35.41	35.50	35.78	1.14	inch	
900mm	894.6	899.3	901.7	908.8	29.0	mm	

Model	L1		L2		L3	W	Unit
	MAX	MIN	MAX	MAX	MAX		
4 ft	47.22	47.41	47.50	47.78	1.14	inch	
1200mm	1199.4	1204.1	1206.5	1213.6	29.0	mm	



Example: SL-T8-13-P-4-40-G

SL						
Series	Type	Wattage	Optics	Size	CCT & CRI	Series
SL=Starco Lighting	T8=T8 Lamp	09=9W 10=10.5W 13=13W 15=15W 18=18W 22=22W	P=Frosted C=Clear	2=2ft 4=4ft	70 Plus CRI 47= 4000K 57= 5000K 80 Plus CRI 30= 3000K 40= 4000K 50= 5000K 90 Plus CRI 39= 3000K 49= 4000K 59= 5000K	S=Superior Series G=Gold Series
Accessories						
SL-T8K-xF=Fused Wiring Kits, x-number of sockets SL-T8K-xF-y=Other Wiring Kits, y-model of specialty socket SL-T8K-0=AAG-3249 Standard G13 Socket, solid rotary 120-277V STB-x-T8-N-F=Bracket kit, x-2 or 3 for 2lamp or 3lamp, F for Fuse SL-T8K-8R4=2 lamp Strip Bracket Kit			SL-T8K-F=In-line Fuse SL-TH-T8=Magnetic Holder G13R17D=G13 to R17 Adapter Label-DY=Danger Label - Yellow Label-SS=Safety Label - Silver			


Performance Table

Wattage	Size	70 CRI @4000K / 5000K		Lens
		Lumens	Efficacy	
09	2'	1350	150	Clear
09	2'	1305	145	Frosted
10.5	4'	1837	175	Clear
10.5	4'	1785	170	Frosted
13	4'	2275	175	Clear
13	4'	2210	170	Frosted
15	4'	2550	170	Clear
15	4'	2475	165	Frosted
18	4'	2970	165	Clear
18	4'	2880	160	Frosted
22	4'	3520	160	Clear
22	4'	3410	155	Frosted


CRI	CCT	OUTPUT
70	5000K	100%
	4000K	100%
80	5000K	97%
	4000K	97%
	3000K	85%
90	5000K	86%
	4000K	85%
	3000K	78%

Wiring Diagram

1. Cut off ballast

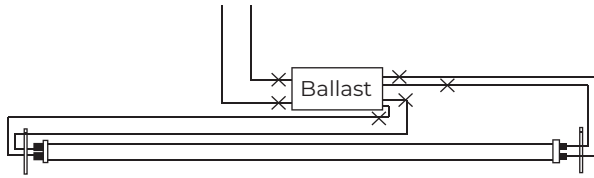


2. Single lamp wiring

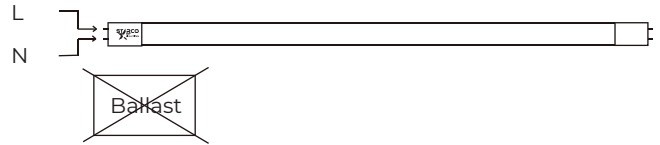

Kit Accessories


Fast-Fuse Socket Kit - SL-T8K-xF & SL-T8K-xF-y

Starco's TLED lamps work with Starco's Fast-Fuse Socket Kits. These prewired harnesses offer a fast and robust installation process that adds safety and security to a facility's lighting infrastructure. The Fast-Fuse Socket Kits reduce installation time significantly and enable installers to move from fixture to fixture at a steady pace, saving on labor costs. The integrated fuse system mitigates risks involving electrical shorts, arcs, defective sockets, faulty wiring and mistaken replacement of fluorescent lamps.

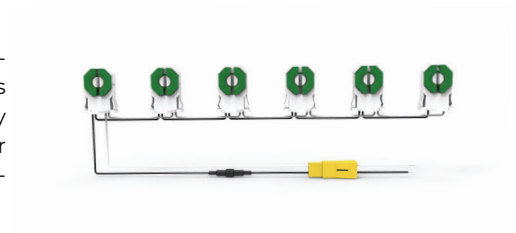

U-Tube Retrofit Kit - STB-x-T8-N-F

Prewired troffer brackets are designed for simple, safe and trouble free installation. Mounting is easy with slots replacing holes and flexible placement within the existing fixture. The brackets can be mounted either on the inside at the top or on the end cap of the existing troffer.



Variety of Sockets- SL-T8K-x

There is a variety of different lamp holders in existing fluorescent fixtures nowadays. Starco offers a wide variety of lamp holders to meet your fixture requirement.



Fast-Fuse Kit - SL-T8K-F

Prewired inline fuse kit with pigtail and quick disconnect is in compliance with NEC 410.130(G) and adds safety to the circuit. Use this kit when the existing sockets are not necessary to change.



Emergency Inverter

Starco's Emergency Lighting Inverter is designed for use with any direct voltage connected to Starco's LED lighting products. The output voltage is 170VDC. The emergency lighting inverter can provide power to Starco TLED T8 lamps for over 90 minutes.



Occupancy Sensor

Starco's TLED lamp works with the Legrand Wattstopper® photo/motion sensor that provides more energy savings without sacrificing performance. The lamps can be set as multi level control.



HBP-111, HBP-112, FSIR-100